



# strands<sup>®</sup>

-lighting division

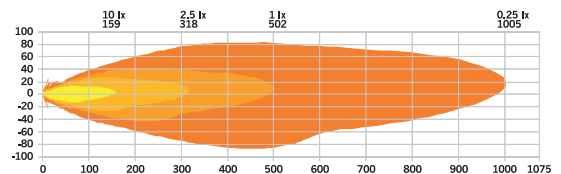

## FIREFLY ONE DRIVING LIGHT

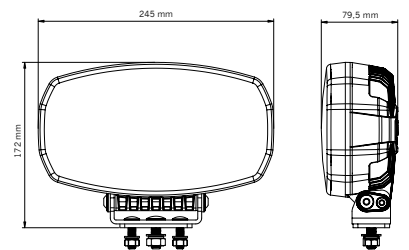

<b>Voltage</b>	10-48V DC
<b>Consumption: high beam:</b>	146 W
<b>Consumption: warning light:</b>	36 W
<b>Theoretical lumen</b>	15 400 lm
<b>Actual lumen</b>	10 500 lm
<b>1 lux @</b>	502 m
<b>IP-class</b>	IP67
<b>Color Temperature</b>	5700K
<b>Beam pattern</b>	Optimized beam
<b>Functions</b>	High beam, position light, warning light
<b>Connection</b>	Cable

<b>Cable length</b>	2500 mm
<b>Material housing</b>	Aluminium
<b>Material lens</b>	Polycarbonate
<b>Length</b>	245 mm
<b>Depth</b>	79,5 mm
<b>Height</b>	154,5 mm
<b>Height including bracket</b>	172 mm
<b>Operating temperature</b>	-40°C - +65°C
<b>E-approved</b>	ECE R65 (XA2) R148, R149
<b>Ref</b>	45
<b>EMC-certificate</b>	ECE R10

Part No. 270953