

Fault Troubleshooting

Please follow the below steps before reporting a fault.

Check 1

Make sure that the vehicles batteries are charged and that ample power is being supplied to the microwave unit. If batteries are low, start the vehicles engine and run for 5 minutes. The microwave unit has a safe guard against low power and battery drain.



Check 2

Check there is power being supplied to the microwave.
Double check all in-line fuses.



Check 3

On the front of the microwave is a power switch.
Check that the switch has an illuminated red light.



Check 4

On the front of the microwave is a timer dial. (Lower dial)
Check that the dial is turned to register a time. The microwave will not power on unless the dial is turned and a time registered.



Still not working?

Report the fault to the dealer you purchased the microwave from or fitting centre that installed the microwave unit. TruckChef Service Exchange Procedure applies.



Please note - Instructions for Features, Controls and Cooking only

Microwave Features Manual

The control panel on the front of the microwave unit consists of two function operators. One is a timer and the other a power knob.

Power Selector.

You use this knob to choose a cooking power level. It is the first step to start a cooking session.

Timer Selector.


This knob offers visual timing settings. Just select the desired cooking time by turning the knob. Up to 30 minutes per cooking session.

Microwave Cooking.


The TruckChef microwave offers six power levels from which to choose from. You can select and increase the power levels by turning the knob clockwise. The power levels can be classified as the following;

	Power Input.	Description.
1.	100%	High
2.	85%	M. High
3.	66%	Medium
4.	48%	M. Low
5.	40%	Defrost
6.	17%	Low

Note - As soon as the timer is turned and the unit has power the oven will start cooking. When selecting times less than 2 minutes, turn the dial past 2 minutes and then back to the desired time. The timer should always be returned to the zero position after use. Check food is piping hot and cooked before consuming. The above power levels are only a guide and should in no way be used to alter any food / meal recommended cooking times.

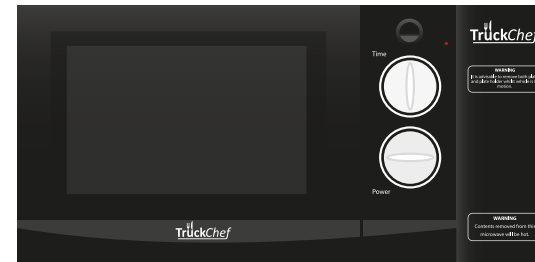

Side Mount Model

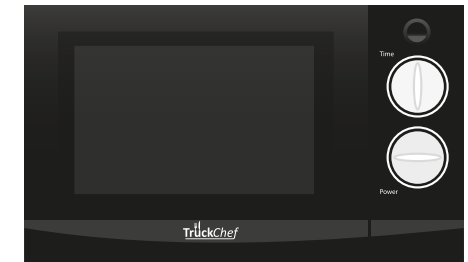

Rear Mount Model

Key Features

- 24v Input
- 800w Power
- 20 Litre Capacity
- Stylish Design
- Dial Based Control System
- 6 Microwave Power Levels
- Cooking End Signal
- 30 Minute Mechanical Timer
- Defrost Setting
- 40 Amp In-line Fuse Recommended (Within Wiring Loom)
- Full Fitting Kits and Templates Provided for Quick and Easy Fitting.
- Full Warning Details Printed to Outside of Microwave Unit.
- EC Approved.
- Additional Protection Provided by Built in Fuse.
- 21.5v (+/-) Cut Out. Preventing Any Vehicle Non-starts.
- Secure Locking Door.

WARNING NOTES

Warranty will be void if the product is tampered with or dismantled in any way. It is recommended that this appliance should only be fitted by a qualified vehicle electrician. When fitting you must allow at least 25mm clearance under the microwave for circulation. Food removed from this microwave oven after cooking will be hot.